

Vattentäta Nödstopp IP67

Art nr

E 37 702 76	2 NC	PG16
86 050 537	2 NO	PG16
86 050 538	NO + NC	PG16




Electrical data

Contacts

Ratings as per IEC 60947-5-1

Rated insulation voltage, U	300 V
Rated thermal current, I	5 A
Rated operational current, I	
Utilization category AC-15	at: 240 V 1 A
Rated operational current, I	at: 24V 0.3 A
Utilization category DC-13	at: 125 V 0.2 A

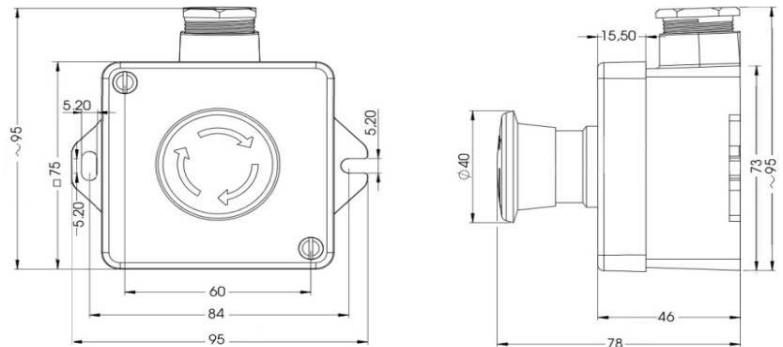

Art nr

E 37 702 77	2 NC	PG16
86 050 539	2 NO	PG16
86 050 540	NO +NC	PG16



Switching capacity :

Rated operational current Ie A

AC-15

115 V	Ie 6A
220 V-240 V	Ie 4A
380 V-415 V	Ie 4A
500 V	Ie 2A

DC-13

24 V	Ie 3A
42 V	Ie 1,7A
60 V	Ie 1.2A
110 V	Ie 0.6A
220 V	Ie 0.3A

