

# ELITA®



# VM02 6060


[www.vmsrl.com](http://www.vmsrl.com)

# VM02

mod.6060

## MANHOLE COVERS AVAILABLE

### A



STAINLESS  
STEEL manhole  
cover almond  
finish 400KN

### B



STAINLESS  
STEEL manhole  
cover to fill  
250KN



## EQUIPMENT EXAMPLES

### A EVENTS/STAGE

- Nr 1 5p 63A interlocked socket with protection
- Nr 4 CEE 3p 16A sockets with protection
- Nr 1 power cable or terminal block

### B EVENTS/STAGE

- Nr 1 5p 63A interlocked socket with protection
- Nr 1 CEE 5p 32A socket with protection
- Nr 2 CEE 3p 16A sockets with protection
- Nr 1 power cable or terminal block

### C MARKETS/CAMPSITES

- Nr 8 CEE 3p 16A sockets with protection
- Nr 2 1/2" ball valves
- Nr 1 power cable or terminal block

## TYPE OF MOVEMENT

**A** semi-automatic lifting with gas springs and release key

## CONNECTION SYSTEM

- H07RN-F power cable (standard 3.00 mt)
- Terminal block

## CONTAINMENT BOX

RBK concrete box

External dimensions 670x670mm with height 600mm

## ADDITIONAL EQUIPMENT

- Electricity consumption meters
- Water consumption meters
- Compressed air couplings
- Audio/video connectors
- RJ-data/video/telephone jacks
- Water outlet/ valves 1/2" or 3/4"

# PRODUCT SPECIFICATIONS


## MECHANICAL CHARACTERISTICS

The retractable power tower mod.VM02 6060 of New VMR for the distribution of electricity and services. Manhole cover in AISI 304 stainless steel type A/B with net light 600x600mm and total height 560mm. Opening eased by a pivot partially removable from the lid surface and by the double gas actuator springs. Closing guaranteed by a safety bronzed bayonet lock in AISI 304 stainless steel, operated by a square or triangular key. It's possible to use the unit with its cover in rest position, thanks to a special rubberized door for cable outlet (max 1x63A). Removable AISI304 stainless steel plate for the water or electrical equipment (in this case arranged for earthing). The containment structure is made of AISI 304 stainless steel of 20/10 thickness. Electro pickling and electropolishing with passivation of stainless steel to finish and clean their manhole covers for retractable power towers and flip lid supply units from welding marks. Completed with RBK containment concrete box.

## ELECTRICAL CHARACTERISTICS

Electrical equipment containment box with IP 66 protection IEC 60 529 and CE70-1 double insulation in thermoplastic material free of halogen self-extinguishing halogen, painted gray RAL 7035 resistant to abnormal heat and fire up to 650 ° (incandescent wire test according to IEC 60 695-2 -1). Elastomer sealing gaskets for dimensional stability in continuous operation from -20 ° to + 85 °. Resistance to chemical agents (water, saline solutions, acids, bases and oils) and atmospheric agents. Reference standards: CEI 23-48 and IEC 60 670. This system is suitable for manufacturing equipment and for places with a higher risk of fire (IEC 64-8 / 7).

## TECHNICAL DRAWING

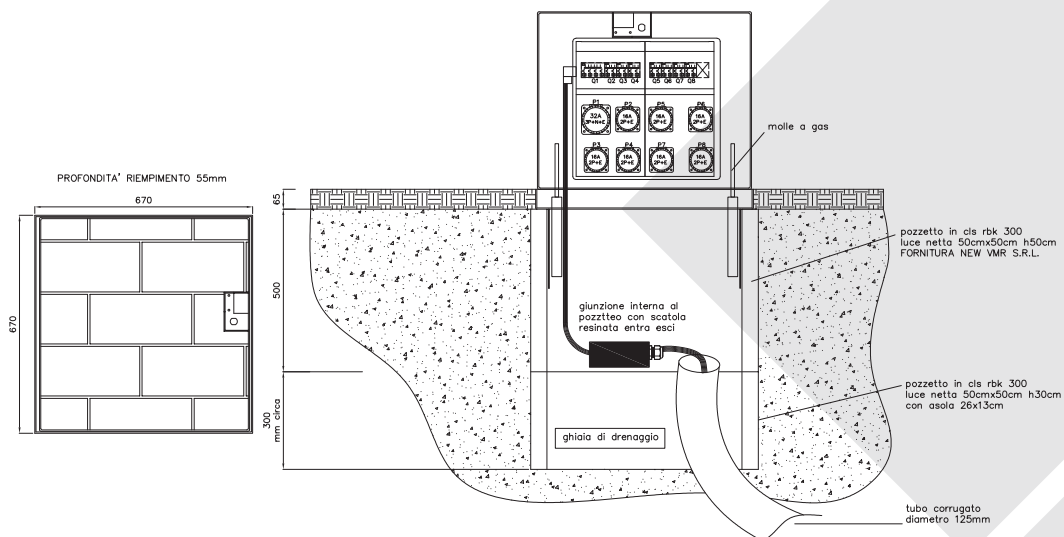

For further information and for tailor-made solutions please contact us at:  
[info@vmrsl.com](mailto:info@vmrsl.com)

# ELITAF<sup>®</sup>

[www.elitab.se](http://www.elitab.se)



[www.vmrsl.com](http://www.vmrsl.com)

New VMR s.r.l, Via Lario 31, 22060 Cantù (CO) Italy  
Tel. +39 031-704673 Fax +39 031-7090081  
[info@vmrsl.com](mailto:info@vmrsl.com)